
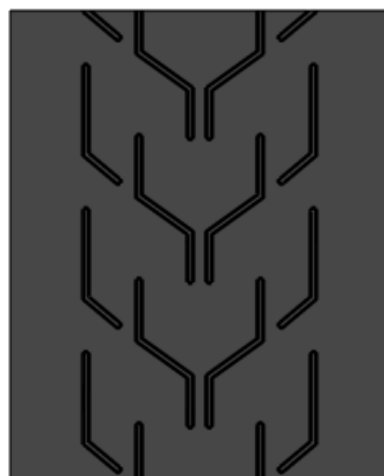



FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **CC 620 x 25**

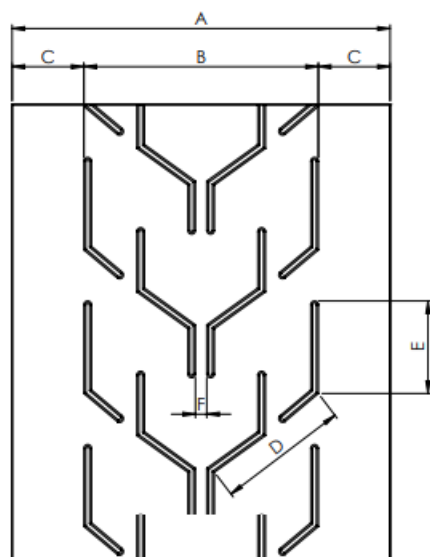

Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	F (mm)	P (mm)
CC 620 x 25	650	620	15	345	235	30	380
	700	620	40	345	235	30	380
	750	620	65	345	235	30	380
	800	620	90	345	235	30	380
	850	620	115	345	235	30	380
	900	620	140	345	235	30	380
	950	620	165	345	235	30	380
	1000	620	190	345	235	30	380

Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

-EP500/4:C5+2Y(grosime 10mm x 4insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzile sunt fabricate in Romania conform DIN 22102.

Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20° - 35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

SC IKOSAR SRL



IKOSAR
articole tehnice din cauciuc



de performanta

Targu Neamt, str. Stefan Cel Mare, Nr. 278A
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999
E-mail:vanzari@ikosar.ro <http://www.ikosar.ro>