



# FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **V-DESCHIS 300 x 15**

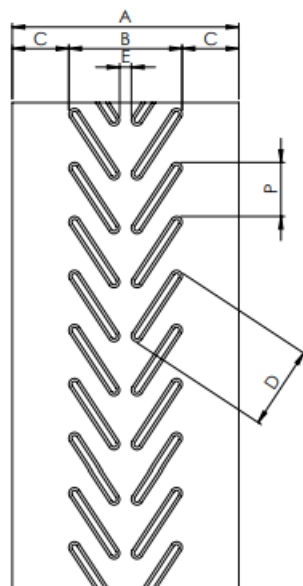

Profil raclete



Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	P (mm)
<b>V-DESCHIS 300 x 15</b>	300	300	0	220	31	143
	350	300	25	220	31	143
	400	300	50	220	31	143
	450	300	75	220	31	143
	500	300	100	220	31	143
	550	300	125	220	31	143
	600	300	150	220	31	143

## Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzile sunt fabricate in Romania conform DIN 22102.

## Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20°-35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

## SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A  
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999  
E-mail: [vanzari@ikosar.ro](mailto:vanzari@ikosar.ro) <http://www.ikosar.ro>



**IKOSAR**  
articole tehnice din cauciuc

**30** ani  
de performanta