

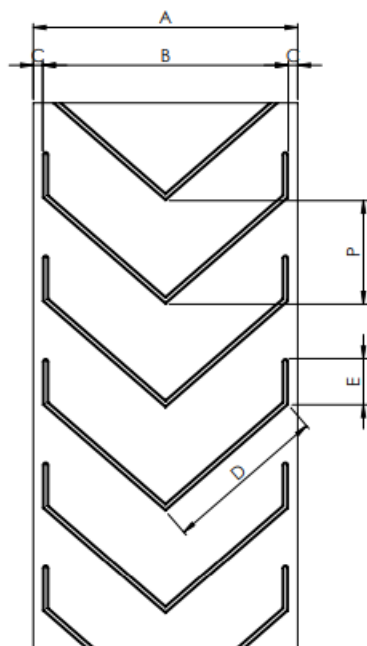


FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **V 650 x 15**

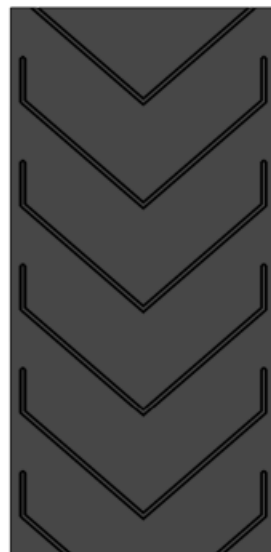

Profil raclete



Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	P (mm)
V 650 x 15	650	650	0	430	122	274
	700	650	25	430	122	274
	750	650	50	430	122	274
	800	650	75	430	122	274
	850	650	100	430	122	274
	900	650	125	430	122	274
	950	650	150	430	122	274
	1000	650	175	430	122	274

Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

- EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)
- EP500/4:C4+2Y (grosime 10mm x 4 insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzile sunt fabricate in Romania conform DIN 22102.

Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20°-35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999
E-mail: vanzari@ikosar.ro <http://www.ikosar.ro>



IKOSAR
articole tehnice din cauciuc

30 ani
de performanta