



# FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **Y 410 x 25**

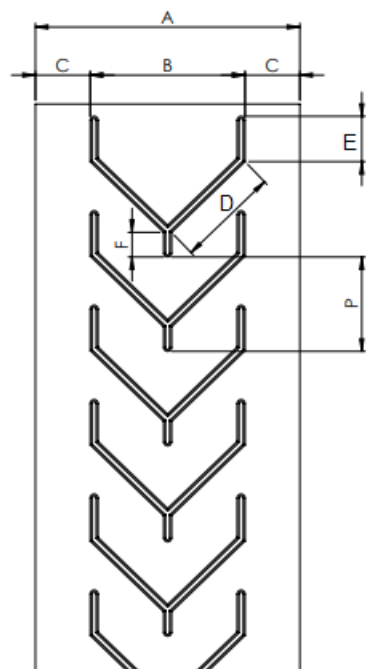

Profil raclete

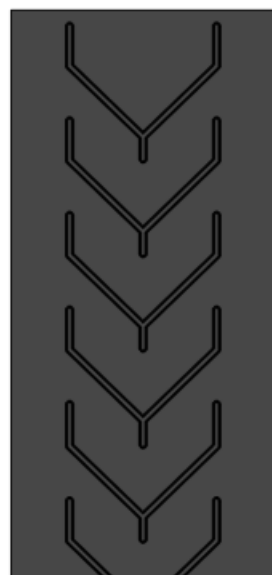

Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	F (mm)	P (mm)
<b>Y 410 x 25</b>	450	410	20	270	120	65	250
	500	410	45	270	120	65	250
	550	410	70	270	120	65	250
	600	410	95	270	120	65	250
	650	410	120	270	120	65	250

## Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzile sunt fabricate in Romania conform DIN 22102.

## Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat ( $20^{\circ}$ - $35^{\circ}$ ), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

## SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A  
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999  
E-mail: [vanzari@ikosar.ro](mailto:vanzari@ikosar.ro) <http://www.ikosar.ro>



**IKOSAR**  
articole tehnice din cauciuc

**30** ani  
de performanta