

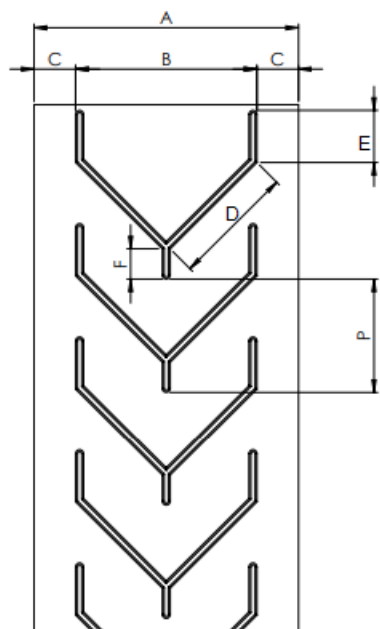


## FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **Y 480 x 25**

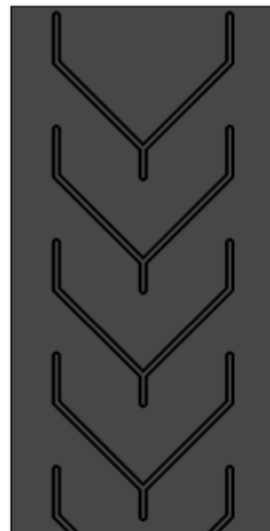

Profil raclete



Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	F (mm)	P (mm)
Y 480 x 25	500	480	10	324	138	80	300
	550	480	35	324	138	80	300
	600	480	60	324	138	80	300
	650	480	85	324	138	80	300

### Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzele sunt fabricate in Romania conform DIN 22102.

### Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20°-35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

### SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A  
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999  
E-mail: [vanzari@ikosar.ro](mailto:vanzari@ikosar.ro) <http://www.ikosar.ro>



**IKOSAR**  
articole tehnice din cauciuc

**30** ani  
de performanta