

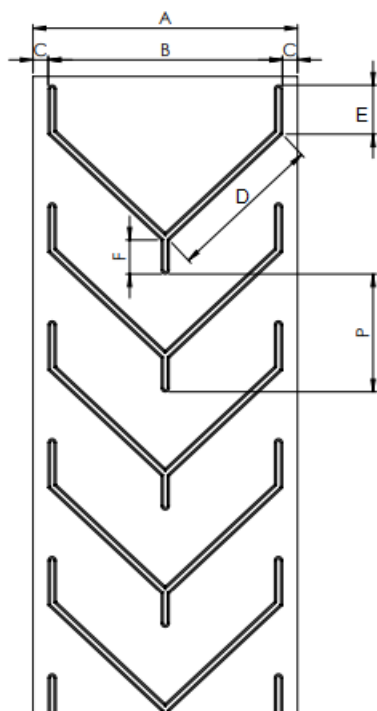


FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **Y 620 x 25**

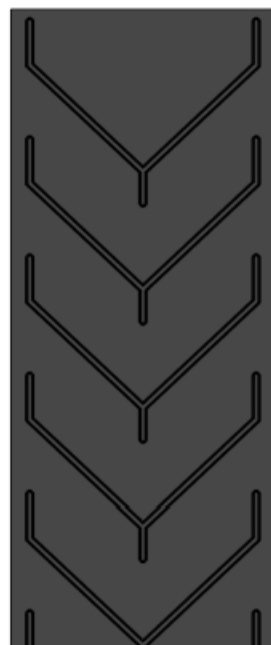

Profil raclete



| Tip racleti | Latime banda A(mm) | Latime racleti B(mm) | C (mm) | D (mm) | E (mm) | F (mm) | P (mm) |
|-------------|--------------------|----------------------|--------|--------|--------|--------|--------|
| Y 620 x 25 | 650 | 620 | 15 | 410 | 130 | 90 | 312 |
| | 700 | 620 | 40 | 410 | 130 | 90 | 312 |
| | 750 | 620 | 65 | 410 | 130 | 90 | 312 |
| | 800 | 620 | 90 | 410 | 130 | 90 | 312 |
| | 850 | 620 | 115 | 410 | 130 | 90 | 312 |
| | 900 | 620 | 140 | 410 | 130 | 90 | 312 |
| | 950 | 620 | 165 | 410 | 130 | 90 | 312 |
| | 1000 | 620 | 190 | 410 | 130 | 90 | 312 |

Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

-EP500/4:C4+2Y(grosime 10mm x 4insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzele sunt fabricate in Romania conform DIN 22102.

Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20°-35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999
E-mail:vanzari@ikosar.ro <http://www.ikosar.ro>



IKOSAR
articole tehnice din cauciuc

30 ani
de performanta