



FISA TEHNICA

BANDA TRANSPORTOARE CU RACLETI CHEVRON TIP **V-DESCHIS 450 x 15**

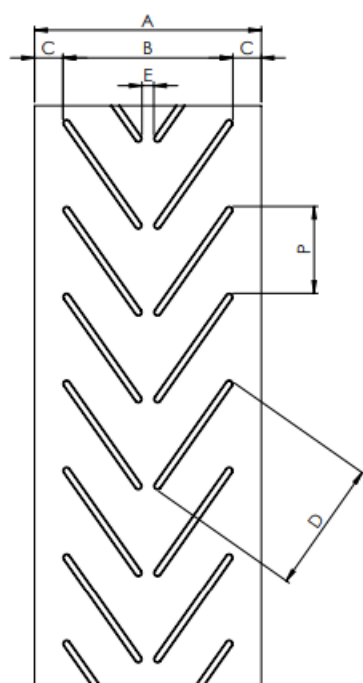

Profil raclete



Tip racleti	Latime banda A(mm)	Latime racleti B(mm)	C (mm)	D (mm)	E (mm)	P (mm)
V-DESCHIS 450 x 15	450	450	0	350	31	230
	500	450	25	350	31	230
	550	450	50	350	31	230
	600	450	75	350	31	230
	650	450	100	350	31	230

Caracteristici:

Sunt fabricate prin procedeul de turnare directa.

Gama de fabricatie in serie:

-EP400/3:C4+2Y (grosime 8mm x 3 insertii EP125)

Se fabrica cu margini debitate.

Alte tipuri de benzi si alta calitate a invelisului de cauciuc W,X,Z se fabrica numai la comanda.

Benzile sunt fabricate in Romania conform DIN 22102.

Domenii de utilizare:

Sunt destinate transportului diverselor materiale (piatra, nisip, ciment, var, lemn, rumegus, cereale, deseuri, etc.), atat in plan orizontal, dar mai ales in plan inclinat (20°-35°), racletii avand ca scop marirea capacitatii de transport a benzii, distribuirea uniforma a materialului transportat pe banda si asigurarea unui flux cat mai constant a materialului transportat.

SC IKOSAR SRL

Targu Neamt, str. Stefan Cel Mare, Nr. 278A
Jud. Neamt, Romania, Tel/Fax: +40 233 662 999
E-mail: vanzari@ikosar.ro <http://www.ikosar.ro>



IKOSAR
articole tehnice din cauciuc

30 ani
de performanta