


SC IKOSAR SRL

Sediul: Timisesti jud. Neamt
 Tel/fax: 0233/ 787041
 Mobil: 0744518837; 0746696164
 E-mail: ikosar93@yahoo.com; ikosar@cryo.ro
 http: www.ikosar.ro

Exemplar nr. _____
 Cod: FT-3-02; Editia:1;
 Revizia 0/01.09.2008
 Nr. de pagini 2
 Pagina: 2

FISA TEHNICA FT-3-02

BANDA TRANSPORTOARE CU RACLETI TIP " Y " - BTRY

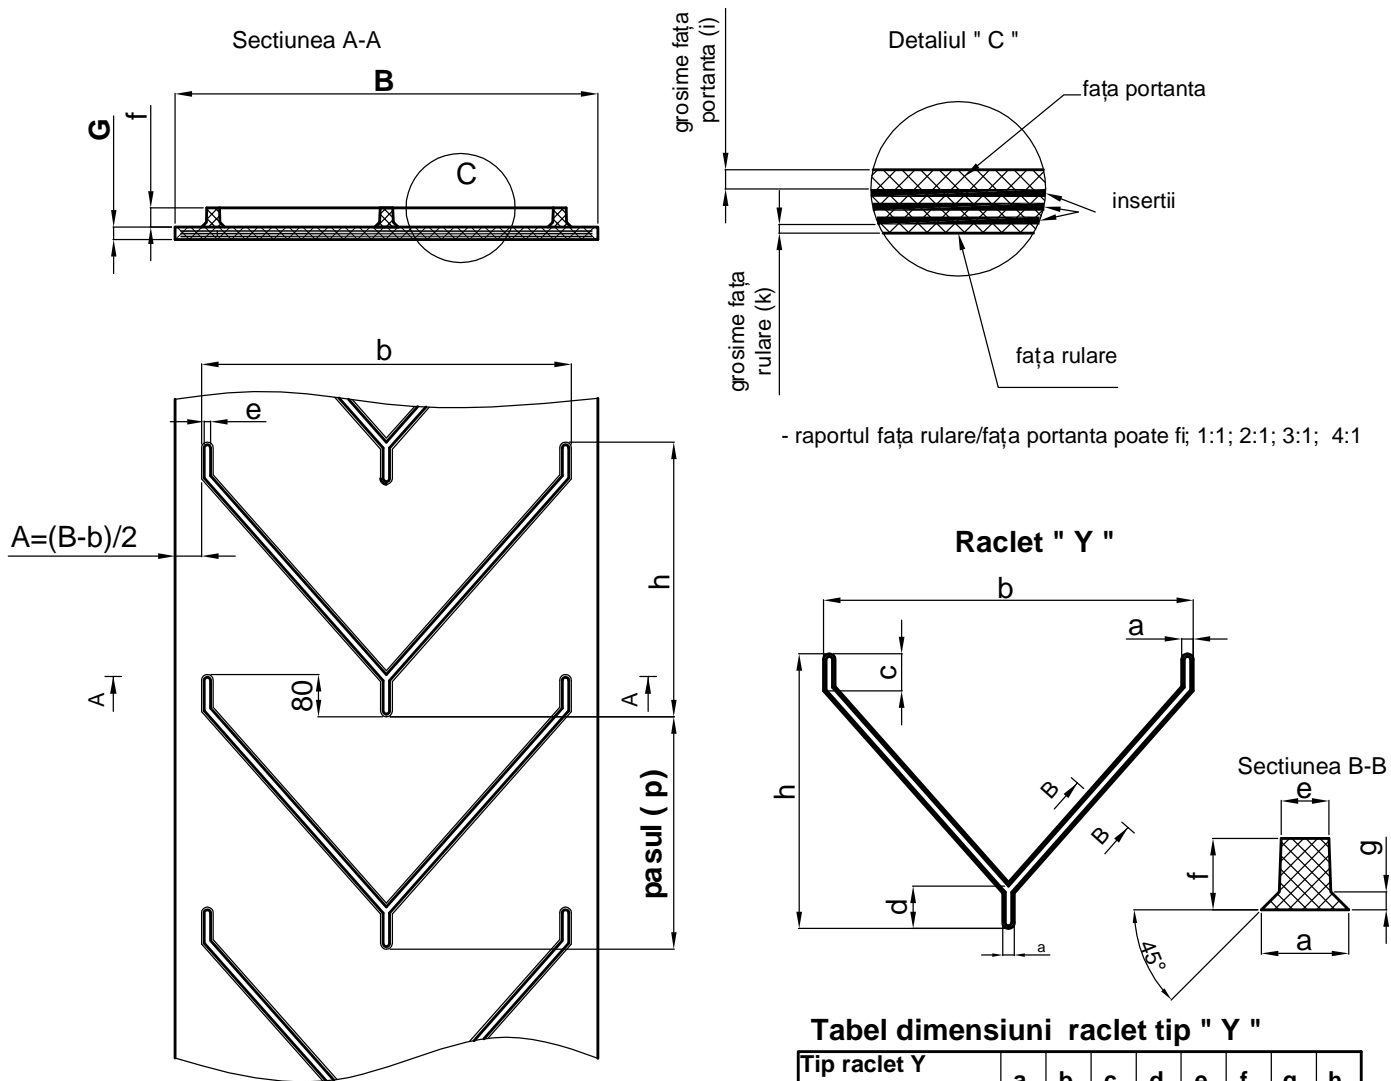

Tabel dimensiuni banda cu racleti tip " Y "

Tip banda cu raclet Y Latime banda	Tip raclet Y pretabil la tipul de banda	p pas racleti	G
BTRY- 300	Y 200	minim 440 mm sau dupa cerinta beneficiarului	grosimea benzii 3.....14 mm, in functie de cerinta beneficiarului
BTRY- 350	Y 200; Y 290		
BTRY- 400	Y 200; Y 290		
BTRY- 450	Y 290; Y 390		
BTRY- 500	Y 290; Y 390		
BTRY- 550	Y 390; Y 445		
BTRY- 600	Y 390; Y 445; Y 490; Y 550		
BTRY- 650	Y 445; Y 490; Y 550; Y 620		
BTRY- 700	Y 490; Y 550; Y 620		
BTRY- 750	Y 550; Y 620		
BTRY- 800	Y 620; Y 695		
BTRY- 1000	Y 620; Y 695; Y 800		

Tabel dimensiuni raclet tip " Y "

Tip raclet Y Deschidere raclet	a	b	c	d	e	f	g	h
Y 200	18	200	70	105	12	15	3	500
Y 290		290						
Y 390	21	390	80	80	18	5		
Y 445		445						
Y 490		490	70	70	12	6		
Y 550	22	550						
Y 620	25	620						
Y 695	22	695	70	70	12			
Y 800		800						

NOTA:

Se pot executa de benzi cu racleti tip " Y " de latimi intermediare celor indicate in tabel .
 Racletii tip " Y " pot fi dispusi pe banda si dupa specificatia clientului.
 Toate cotele sunt exprimate in milimetri