
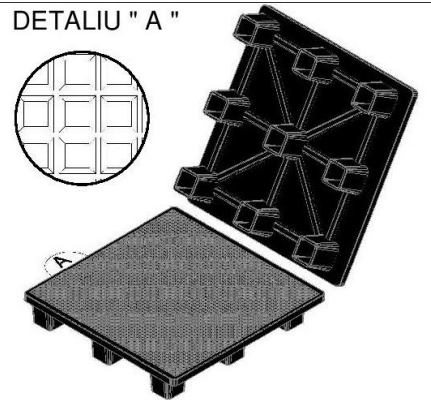
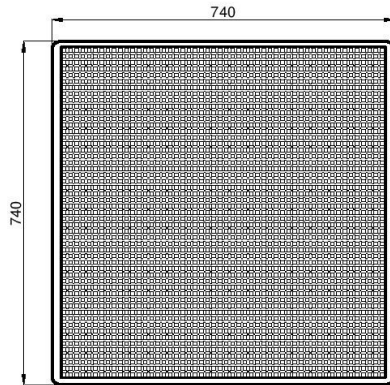


FISA TEHNICA

PLATFORMA ELECTROIZOLANTA MOBILA TIP PEM 740



Platformele electroizolante mobile sunt utilizate ca mijloc de protectie impotriva electrocutarii, la instalatiile electrice interioare si exterioare.
Se utilizeaza in asociere cu alte echipamente de protectie electroizolante (manusi si cizme electroizolante).
Se folosesc in instalatiile electrice de: JT, MT, IT.
Tensiunea de incercare 40 KV.
Proprietatile dielectrice conform buletin de incercari anexat.
Termenul de garantie este de 12 luni.
Poate fi utilizat dupa termenul de garantie numai dupa reexecutarea testului PRAM.

Caracteristici tehnice:

- Dimensiuni (Lxlxh), 740mmx740mmx100mm
- Structura platformei, monobloc compusa din placa de baza si noua picioare.
- Culoare: negru.
- Suprafata de contact antiderapanta.
- Greutate platformei 23 ±0,5 Kg.
- Sarcina maxima admisibila 150 Kg.
- Temperatura de lucru, -25°C.....55°C.
- Sunt confectionate din cauciuc electroizolant cu duritatea de peste 90 Sh.



SC IKOSAR SRL

TG.NEAMT str. STEFAN CEL MARE nr .278A jud.NEAMT- ROMANIA
tel/fax : 0233/662999
e-mail: vanzari@ikosar.ro
<http://www.ikosar.ro>